
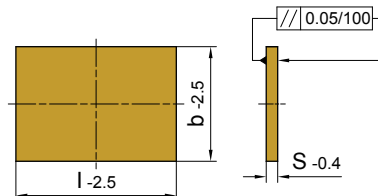


N50

Plaque isolante P = 600 N/mm²

exemple de commande:
1 pièce N50 95/95/3



Température d'utilisation : 200°C
Conductivité thermique : 0,19 W/mk
Masse volumique : 1,9 g/cm³



b	l	S	D	
95	95	3	-	•
100	130			•
156	156			•
	196			•
	246			•
190	246			•
196	196			•
	246			•
206	156			•
	196			•
95	95	5		•
100	130			•
156	156			•
	196			•
	246			•
	296			•
	396			•
190	246			•
	296			•
196	196			•
	246			•
	296			•
	346			•
206	156			•
	196			•
218	246			•
	296			•
246	246			•
	296			•
	346			•
	396			•
254	246			•
276	246			•
126	156	6		•
	246			•
156	156			•
	196			•
	206			•
	246			•
	296			•
	346			•
	396			•
	446			•

b	l	S	D	
196	196	6	-	•
	206			•
	246			•
	296			•
	346			•
	396			•
	446			•
	496			•
216	246			•
	296			•
	396			•
246	246			•
	266			•
	296			•
	346			•
	396			•
	446			•
	496			•
	546			•
	596			•
266	296			•
196	296	7		•
	346			•
	396			•
	446			•
218	396			•
246	246			•
	296			•
	346			•
	396			•
	446			•
254	246			•
276	296			•
296	296			•
	346			•
	396			•
	446			•
346	346			•
	396			•
	446			•
	496			•
	546			•

N50

Plaque isolante P = 600 N/mm²

exemple de commande:
1 pièce N50 396/396/7

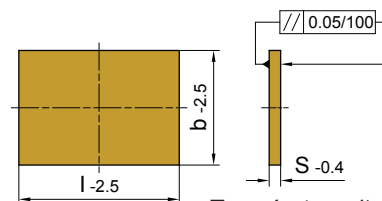

Température d'utilisation : 200°C
Conductivité thermique : 0,19 W/mk
Masse volumique : 1,9 g/cm²



b	l	S	D	
396	396	7	-	•
	446			•
	496			•
	546			•
496	546			•
296	296	8		•
	346			•
	396			•
	446			•
	496			•
	546			•
	596			•
	646			•
	696			•
346	346			•
	396			•
	446			•
	496			•
	546			•
	596			•
	646			•
	696			•
	796			•
396	396			•
	446			•
	496			•
	546			•
	596			•
	646			•
	696			•
	796			•
446	446			•
	496			•
	546			•
	596			•
	646			•
	696			•
	796			•
496	496			•
	546			•
	596			•
	646			•
	696			•

b	l	S	D	
496	796	8	-	•
546	546			•
	596			•
	646			•
	696			•
	796			•
596	596			•
	646			•
	696			•
	796			•
	896			•
	996			•
646	646			•
	696			•
	796			•
	896			•
	996			•
696	696			•
	746			•
	796			•
	896			•
	996			•
746	796			•
	896			•
	996			•
796	796			•
	846			•
	896			•
	996			•
846	896			•
	996			•

N50

Plaque isolante P = 600 N/mm²

exemple de commande:
1 pièce N50 246/496/8,5

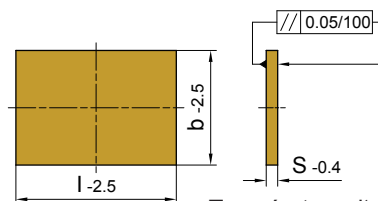

Température d'utilisation : 200°C
Conductivité thermique : 0,19 W/mk
Masse volumique : 1,9 g/cm²

b	l	S	D	
246	496	8.5	-	•
296	296			•
	346			•
	396			•
	446			•
	496			•
	546			•
	596			•
	696			•
346	346			•
	396			•
	446			•
	496			•
	546			•
	596			•
	696			•
	796			•
396	396			•
	446			•
	496			•
	546			•
	596			•
	696			•
	796			•
	896			•
446	446			•
	496			•
	546			•
	596			•
	696			•
	796			•
	896			•
496	496			•
	546			•
	596			•
	696			•
	796			•
	896			•
	996			•

b	l	S	D	
546	546	8.5	-	•
	596			•
	646			•
	696			•
	796			•
	896			•
	996			•
596	596			•
	696			•
	796			•
	896			•
646	596			•
	696			•
	796			•
	896			•
696	696			•
	796			•
	896			•
	996			•
796	796			•
	896			•
	996			•
896	896			•
	996			•