


N32: buses d'injection avec rayon R40

$\alpha = 0,5^\circ / 1,0^\circ / 1,5^\circ$

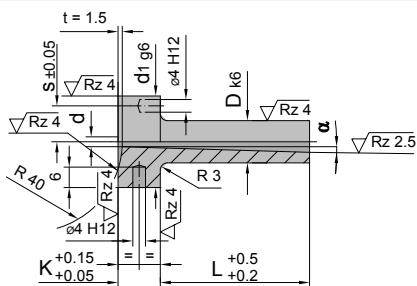

exemple de commande:

1 pièce N32 Ø12/27/2,5/0,5°

matière: 1.2826 ~580HV

α	s	K	d1	D	L	d	
0,5°	11	13	28	12	27	2.5	•
							•
							•
							•
0,5°	11	13	28	12	27	3.5	•
							•
							•
							•
							•
							•
0,5°	15	18	38	18	46	3	•
							•
							•
							•
							•
							•
							•
							•
0,5°	15	18	38	18	46	4	•
							•
							•
							•
							•
							•
							•
							•

α	s	K	d1	D	L	d	
1°	15	18	38	18	27	3	•
							•
							•
							•
							•
							•
							•
1°	20	23	48	24	46	4	•
							•
							•
							•
							•
							•
							•
1,5°	20	23	48	24	56	5	•
							•
							•
							•
							•
							•
							•
1,5°	27	36	46	24	46	4,5	•
							•
							•
							•
							•
							•
							•
1,5°	56	76	86	24	56	6,5	•
							•
							•
							•
							•
							•
							•

α	s	K	d1	D	L	d	
1°	11	13	28	12	22	2.5	•
							•
							•
							•
							•
1°	11	13	28	12	22	3	•
							•
							•
							•
							•
							•
1°	11	13	28	12	22	3,5	•
							•
							•
							•
							•

α	s	K	d1	D	L	d	
1,5°	15	18	38	18	27	3,5	•
							•
							•
							•
							•
1,5°	15	18	38	18	27	4,5	•
							•
							•
							•
							•
							•
1,5°	20	23	48	24	46	4,5	•
							•
							•
							•
							•
1,5°	56	76	86	24	56	6,5	•
							•
							•
							•
							•