


Éjecteur en acier inoxydable, résistant à l'acide

Suivant DIN ISO 6751

NOUVEAU !

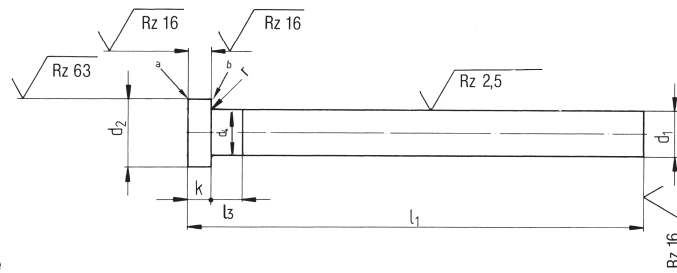

a = ébavuré / b = rayonné

Référence : 612R.

Matière : 1.4112
Acier inoxydable et résistant à l'acide

Dureté : Corps : 56±2HRC / Tête : 45±5HRC

Diamètre d_1 g 6	d_2 0 - 0,2	d_4	k 0 - 0,05	r + 0,2 0	l_1 + 2 0					l_3		
					100	125	160	200	250			
1,0	2,5	$d_1 + 0,03$	1,2	0,2	●	●				5		
2,0	4,0				●	●	●	●				
2,5	5,0		3	0,3	●	●	●	●	●			
3,0	6,0				●	●	●	●	●			
3,5	7,0				●	●	●	●	●			
4,0	8,0				●	●	●	●	●			
4,5	8,0				●	●	●	●	●			
5,0	10,0				●	●	●	●	●			
5,5	10,0		$d_1 + 0,04$	5	0,5	●	●	●	●		●	6
6,0	12,0					●	●	●	●		●	8
8,0	14,0	●				●	●	●	●	10		
10,0	16,0	●				●	●	●	●	12		
12,0	18,0	7	0,8	●	●	●	●	●				

● = en stock. Autres dimensions sur demande